

Fundo drain *Solso* | vertical, DN 50



Description

Fundo drain Solso, vertical, DN 50

Packing unit

Order no.

1 unit


07-37-89/052

- ! • Absorption capacity: 1.00 Litre/Second
- Minimum installation depth: 40 mm
- This drain is only suitable for the Fundo Solso floor elements.

- i • The Fundo Solso vertical drain is an authorised floor drain with a general building authority-approved test certificate.

- 🔧 • 1 drain cover, vertical, DN 50
- 1 drain grate stainless steel, round
- 1 siphon
- 1 shower tray screw-type valve
- 1 main sealing collar
- 1 wedi 610, adhesive sealant for gluing in the tension ring
- 1 shower insert
- 1 cap tool
- 1 O-ring
- 1 tension ring
- 1 PVC cutting aid

Technical drawings

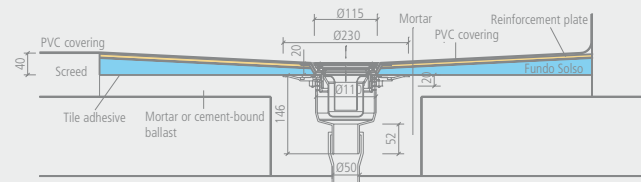

Fundo drain *Solso* | vertical, DN 50, screw in



Description

Fundo drain Solso, vertical, DN 50, screw in

Packing unit

Order no.

1 unit


07-37-89/051

- ! • Absorption capacity: 1.00 Litre/Second
- Minimum installation depth: 40 mm
- This drain is only suitable for the Fundo Solso floor elements.

- i • The Fundo Solso vertical drain is an authorised floor drain with a general building authority-approved test certificate.

- 🔧 • 1 drain cover, vertical, DN 50
- 1 O-ring
- 1 shower tray screw-type valve
- 1 main sealing collar
- 1 wedi 610 adhesive and sealing material for gluing in the tension ring
- 1 drain grate stainless steel, round, screw in
- 1 shower insert
- 1 tension ring
- 1 siphon
- 1 cap tool
- 1 PVC cutting aid

Technical drawings

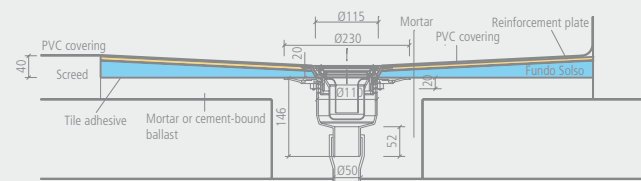

Drains for Fundo Solso floor elements

Fundo drain *Solso* | vertical, DN 50 with fire protection collar



Description

Fundo drain Solso, vertical, DN 50,
with fire protection collar

Packing unit

Order no.

1 unit


07-37-89/054

- ! • Absorption capacity: 1.00 Litre/Second
- Minimum installation depth: 40 mm
- This drain is only suitable for the Fundo Solso floor elements.

- i • The Fundo Solso vertical drain is an authorised floor drain with a general building authority-approved test certificate.

- 📦 • 1 drain cover, vertical, DN 50
- 1 fire-proof cap tool
- 1 shower tray screw-type valve
- 1 PVC cutting aid
- 1 wedi 610 adhesive sealant for gluing in the tension ring
- 1 drain grate stainless steel, round
- 2 cap tools
- 1 fire-proofing
- 1 tension ring
- 1 main sealing collar
- 1 shower insert
- 1 siphon
- 1 O-ring

Technical drawings

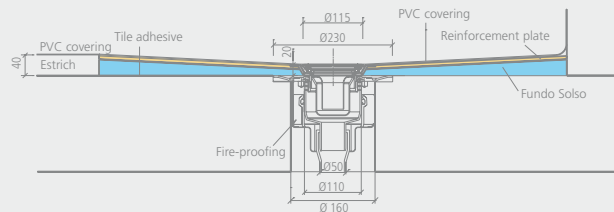

Fundo drain *Solso* | vertical, DN 50 with fire protection collar, screw in



Description

Fundo drain Solso, vertical, DN 50,
with fire protection collar, screw in

Packing unit

Order no.

1 unit


07-37-89/053

- ! • Absorption capacity: 1.00 Litre/Second
- Minimum installation depth: 40 mm
- This drain is only suitable for the Fundo Solso floor elements.

- i • The Fundo Solso vertical drain is an authorised floor drain with a general building authority-approved test certificate.

- 📦 • 1 drain cover, vertical, DN 50
- 1 fire-protection cap tool
- 1 shower tray screw-type valve
- 1 PVC cutting aid
- 1 wedi 610 adhesive and sealing material for gluing in the tension ring
- 1 drain grate stainless steel, round screw in
- 2 cap tools
- 1 fire-proofing
- 1 tension ring
- 1 main sealing collar
- 1 shower insert
- 1 siphon
- 1 O-ring

Technical drawings

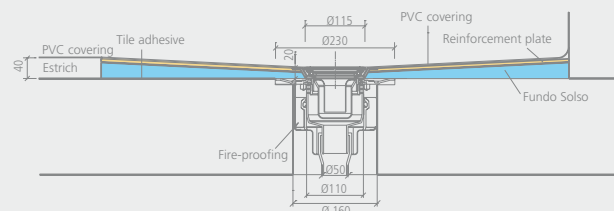


Fundo drain *Solso* | horizontal, DN 50



Description	Packing unit	Order no.
Fundo drain Solso, horizontal, DN 50	1 unit	07-37-90/052

- !** • Absorption capacity: 0.80 Litre/Second
 - Minimum installation depth: 130 mm
 - This drain is only suitable for the Fundo Solso floor elements.
- i** • The Fundo Solso horizontal drain is an authorised floor drain with a general building authority-approved test certificate.
- 🔧** • 1 drain cover, vertical, DN 50
 - 1 shower insert
 - 1 shower tray screw-type valve
 - 1 cap tool
 - 1 wedi 610 adhesive and sealing material for gluing in the tension ring
 - 1 drain grate stainless steel
 - 1 O-ring
 - 1 siphon
 - 1 main sealing collar
 - 1 tension ring
 - 1 PVC cutting aid

Technical drawings

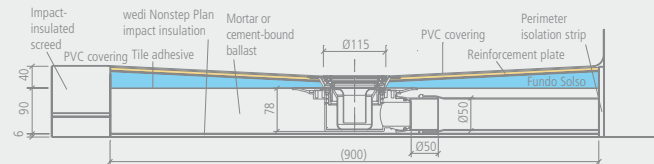

Fundo drain *Solso* | horizontal, DN 50, screw in



Description	Packing unit	Order no.
Fundo drain Solso, horizontal, DN 50, screw in	1 unit	07-37-90/051

- !** • Absorption capacity: 0.80 Litre/Second
 - Minimum installation depth: 130 mm
 - This drain is only suitable for the Fundo Solso floor elements.
- i** • The Fundo Solso horizontal drain is an authorised floor drain with a general building authority-approved test certificate.
- 🔧** • 1 drain cover, vertical, DN 50
 - 1 siphon
 - 1 main sealing collar
 - 1 O-ring
 - 1 wedi 610 adhesive and sealing material for gluing in the tension ring
 - 1 drain grate stainless steel, screw in
 - 1 shower insert
 - 1 shower tray screw-type valve
 - 1 tension ring
 - 1 cap tool
 - 1 PVC cutting aid

Technical drawings

